

SERVICELINE

Catering & Refrigeration Equipment Sales  Est. 1989



**FALCON G31525 GAS
DOMINATOR PLUS RADIANT CHARGRILL**

FALCON G31525 GAS DOMINATOR PLUS RADIANT CHARGRILL

| SPECIFICATION DETAILS | G31525 |
|--|-------------------|
| Total rating (kW - Nett) | 37.2 |
| Total rating (btu/hr - gross) | 139,659 |
| Inlet size | 3/4" BSP |
| Flow rate - Natural gas (m ³ /hr) | 3.65 |
| Flow rate - Propane gas (kg/hr) | 2.89 |
| Inlet pressure (mbar) | 20 / 37 |
| Operating pressure (mbar) | 15 / 37 |
| Cooking area (w x d - mm) | 1460 x 630 |
| Number of burners | 5 |
| Number of branders | 15 |
| Weight (kg) | 348 |
| Weight on stand (kg) | 412 |
| Packed weight (kg) | 380 |
| Packed dimensions (w x d x h - mm) | 1550 x 1000 x 650 |

KEY FEATURES

- 5 x 8.6kW cast iron burners - Quick heat up, reduced waiting time
- Reversible, angled, heavy duty cast iron brander bars - Delivers even heat across entire cooking surface
- Full width cooking area - Maximum output
- Independently controlled burners - Vary heat across unit if required or even turn one side off during quieter periods
- Removable stainless steel surround - Ensures adjacent equipment remains spatter free
- Grease collection tray at front of unit - Catches and contains grease and fat
- Full width debris collection tray below unit - Catches all grease and debris
- Large capacity grease collection container - Easy to remove and empty during service
- Cast iron burners with variable control / turndown - Ensures chargrill is at the desired temperature
- Laser-etched control icons - Permanent, indelible markings

ACCESSORIES

- Griddle plate
- V bars
- Fixed stand
- Factory fitted, adjustable castors
- Fixed installation kit

SIMILAR MODELS

- G31225 radiant chargrill
- G94120 radiant chargrill
- E3925 electric chargrill


INSTALLATION NOTES

Adequate ventilation must be provided to supply sufficient fresh air and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit position.

A clearance of 150mm should be observed between appliance and any combustible wall. Please consult the appliance installation manual for further details.

DIMENSIONS MEASUREMENTS IN MM

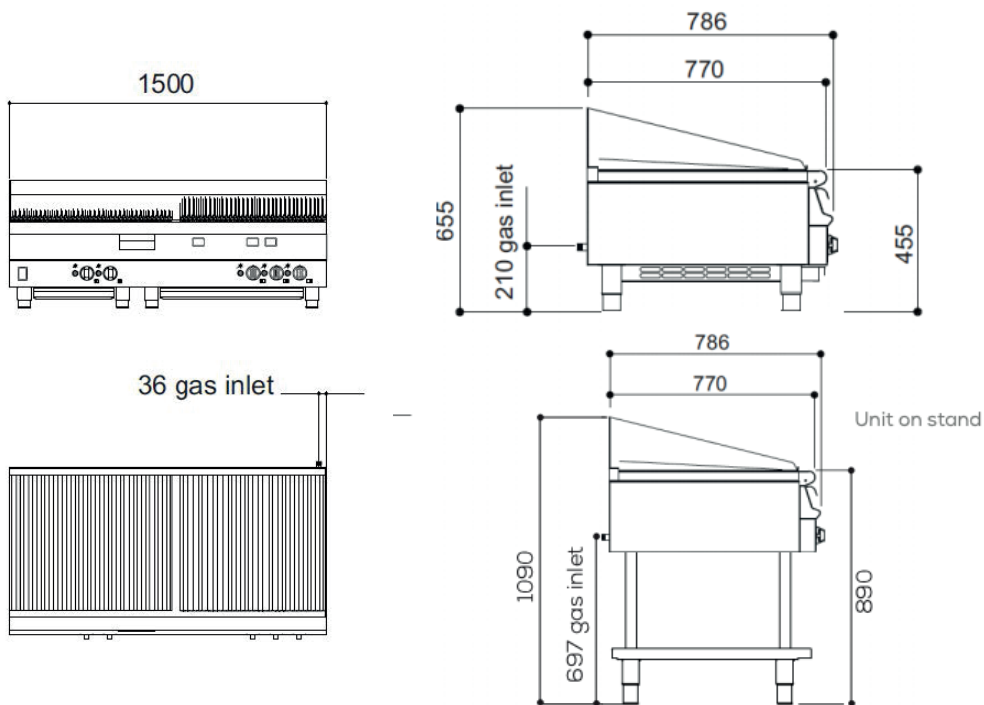

SERVICELINE

Catering & Refrigeration Equipment Sales  Est. 1989



01438 363 040

ServiceLine 1 Icen Ct, Icknield Way, Letchworth Garden City SG6 1TN