

# SERVICELINE

Catering & Refrigeration Equipment Sales  Est. 1989



**FALCON E3101P 6HP ELECTRIC  
DOMINATOR PLUS SIX HOTPLATE OVEN RANGE**

## FALCON E3101P 6HP ELECTRIC DOMINATOR PLUS SIX HOTPLATE OVEN RANGE

SPECIFICATION DETAILS	E3101P 6HP
Electrical rating (kW)	17
Electrical supply voltage	400V 3N~
Minimum electrical supply 400V 3N~ (A)	32
Electrical current split (A)	L1: 24 L2: 24 L3: 22
Hotplate rating (kW)	2 x 6
Total oven element rating (kW)	5
Oven dimensions (w x d x h - mm)	700 x 535 x 430
Oven shelf (w x d - mm)	700 x 535
Gastronorm compatibility	2/1
Weight (kg)	154
Packed weight (kg)	172
Packed dimensions (w x d x h - mm)	1000 x 1000 x 1100

### KEY FEATURES

- Pressed hob with six fast-heating circular hotplates - Reduces heat up times and save energy
- Independently controlled hotplates - Provides flexibility to chef
- Full width, removable drip tray - Easy to remove and keep clean
- Vitreous enamelled oven chamber - Easy to clean and to keep clean
- Wide oven temperature range of 100 - 250°C - Ideal to prepare a wide variety of food
- Twin oven doors with individual catches - Retains heat within the oven chamber
- Oven has 5 shelf positions and allows 2 shelf cooking - Versatile, ideal for a wide range of menu items
- Low profile door handles - Reduces intrusion into work space
- Laser-etched control icons - Permanent, indelible markings

### ACCESSORIES

- Fully integrated extended flue
- Splashplate and plateshelf (not for use with extended flue)
- Oven shelf
- Factory fitted, adjustable castors
- Fixed installation kit

### SIMILAR MODELS

- E3101PD 6HP oven range with drop down door
- E3101 4HP oven range
- E3101 3HP oven range
- E3101P OTC 6HP fan-assisted oven range




### INSTALLATION NOTE

Adequate ventilation must be provided to supply sufficient fresh air and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.

## SPECIFICATIONS AND DIMENSIONS

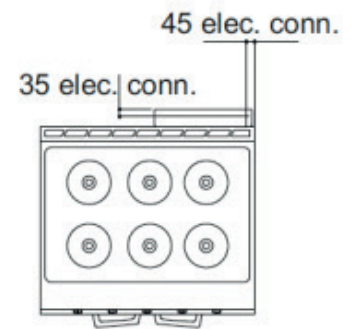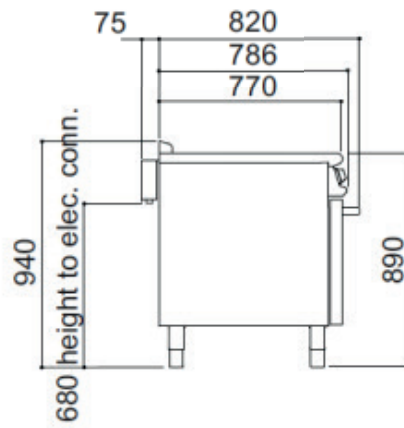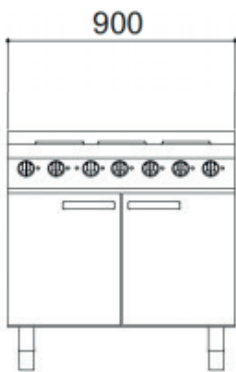



# SERVICELINE

Catering & Refrigeration Equipment Sales  Est. 1989



01438 363 040

ServiceLine 1 Icen Ct, Icknield Way, Letchworth Garden City SG6 1TN