

SERVICELINE

Catering & Refrigeration Equipment Sales  Est. 1989



**FALCON E3913i INDUCTION
DOMINATOR PLUS SERIES RANGE**

FALCON E3913I INDUCTION DOMINATOR PLUS SERIES RANGE

SPECIFICATION DETAILS	E3913i
Electrical rating (kW)	20
Electrical supply voltage	400V 3N~
Required electrical supply (A)	32
Electrical current split (A)	L1: 29 L2: 29 L3: 29
Element rating - hob (kW)	3.5 x 4
Element rating - oven (kW)	6
Oven dimensions (w x d x h - mm)	270
Oven shelf (w x d - mm)	120
Gastronorm compatibility	530 x 535 x 380
Heat zone diameter (mm)	530 x 535
Minimum pan size (mm)	1/1
Weight (kg)	140
Packed weight (kg)	155
Packed dimensions (w x d x h - mm)	1000 x 1000 x 1100

KEY FEATURES

- 4 x 3.5kW energy efficient heat zones - Instant heat and incredibly fast heat up times
- In-built pan detection - No heat generated until a pan is placed on the hob, meaning no wasted energy
- Heavy duty ceramic glass hob - Robust and spillages simply wipe clean, no scrubbing required
- Temperature is precisely controllable - Change from gentle simmer to rolling boil almost instantly
- Low cooking surface temperature and no naked flames - Safer for kitchen staff as reduced risk of burns
- Very little heat emitted into kitchen - Contributes to a more pleasant working environment and existing ventilation doesn't have to work as hard
- 1/1 GN fan-assisted oven - 5 shelf positions with 2 shelves supplied
- Wide oven temperature range of 100 - 250°C - Ideal to prepare a wide variety of food
- Twin oven doors with glass panels - Monitor cooking progress without losing heat

ACCESSORIES

- Oven shelf
- Factory fitted, adjustable castors
- Fixed installation kit

SIMILAR MODELS

- E3914i 4 x 5kW induction range
- E3903i 4 x 3.5kW induction boiling top
- i91104 4 x 3.5kW induction range (GP oven)
- i91104C 4 x 3.5kW induction range (fan-assisted oven)


INSTALLATION NOTES

Adequate ventilation must be provided to supply sufficient fresh air and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations

Install unit on a level, fireproof surface in a well-lit position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.

DIMENSIONS MEASUREMENTS IN MM

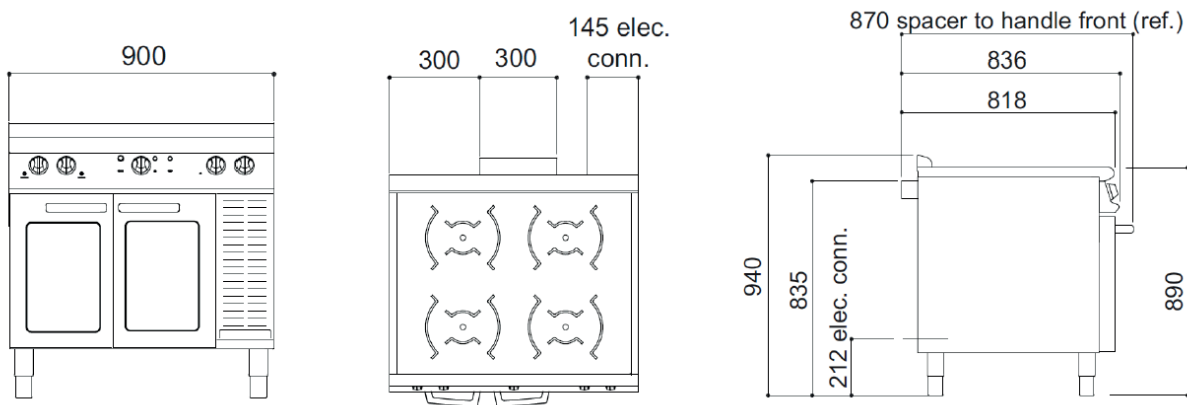

Unit on castors is the same hob height

SERVICELINE

Catering & Refrigeration Equipment Sales  Est. 1989



01438 363 040

ServiceLine 1 Icen Ct, Icknield Way, Letchworth Garden City SG6 1TN