

# SERVICELINE

Catering & Refrigeration Equipment Sales  Est. 1989



**FALCON G1006BX GAS  
CHIEFTAIN SINGLE BULLSEYE SOLID TOP RANGE**

## FALCON G1006BX GAS CHIEFTAIN SINGLE BULLSEYE SOLID TOP RANGE

SPECIFICATION DETAILS	G1006BX
Total rating (natural and propane - kW - Nett)	19.6
Total rating (natural and propane - btu/hr - gross)	73,500
Inlet size (natural and propane)	3/4" BSP
Flow rate - natural (m <sup>3</sup> /hr)	2.00
Flow rate - propane (kg/hr)	1.40
Inlet pressure (natural and propane - mbar)	20 / 37
Operating pressure (natural and propane - mbar)	15 / 37
Hob burner rating * (natural and propane - kW)	10
Hob burner rating * (natural and propane - btu/hr)	37,500
Oven burner rating * (natural and propane - kW)	9.6
Oven dimensions (w x d x h - mm)	650 x 530 x 325
Oven shelf (w x d - mm)	650 x 530
Gastronorm compatibility	2/1
Weight (kg)	245
Packed weight (kg)	258
Packed dimensions (w x d x h - mm)	1000 x 1000 x 1100

### KEY FEATURES

- Solid top model with removable bullseye - Can deliver heat up to 400°C when required
- Graduated heat across the cooking surface - Move pans to suit what you're cooking
- Full width drip tray catches grease and debris - Easy to remove and keep clean
- 2/1 GN compatible oven with anti-tilt shelves - Large capacity output
- Wide oven temperature range of 125 - 275°C - Ideal to prepare a wide variety of food
- Piezo ignition to oven - Simple, trouble-free operation
- Reinforced drop down door - Rest food on door when loading / unloading if necessary
- Oven has 4 shelf positions and allows 2 shelf cooking - Versatile, ideal for a wide range of menu items
- 18mm thick cast iron solid top - Robust and hard-wearing, enough to perform in tough environments

### ACCESSORIES

- Pot rack
- Oven shelf
- Factory fitted, adjustable castors

### SIMILAR MODELS

- G1006FX Twin bullseye solid top range
- G1006X Four burner heavy duty range
- G9181 Solid top range
- E1006 Three hotplate electric range



### INSTALLATION NOTE

Adequate ventilation, whether natural or mechanical, must be provided to supply sufficient fresh air for combustion and to allow easy removal of such products that may present risk to health. Recommendations for ventilation of appliances are given in BS5440:2 and HVCA specification DW/172.

For multiple installations, requirements for individual appliances should be added together. Installation of any such system must be completed in accordance with local and/or national regulations that apply at time of commissioning.

Unit must be installed on a firm level, non-combustible floor in a well lit position. All models should have a 150mm minimum clearance all round from any combustible wall and 150mm from any non-combustible side wall to allow removal of side panels. There should also be a minimum vertical clearance of 1220mm above top edge of flue.

## SPECIFICATIONS AND DIMENSIONS

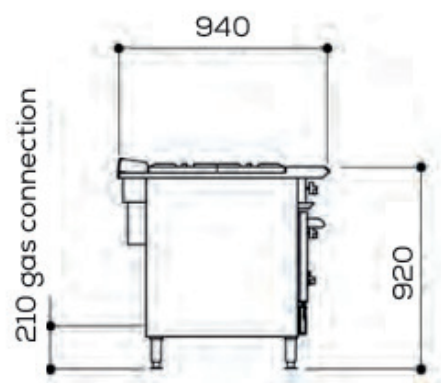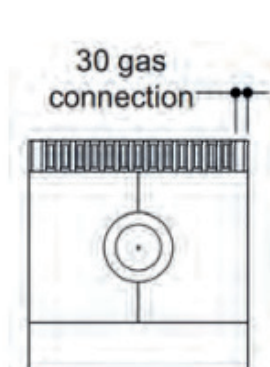

Unit on castors is same height



# SERVICELINE

Catering & Refrigeration Equipment Sales  Est. 1989



01438 363 040

ServiceLine 1 Icen Ct, Icknield Way, Letchworth Garden City SG6 1TN