

# SERVICELINE

Catering & Refrigeration Equipment Sales  Est. 1989



**FALCON G3161D GAS  
DOMINATOR PLUS OPEN TOP GAS RANGE**

## FALCON G3161D GAS DOMINATOR PLUS OPEN TOP GAS RANGE

SPECIFICATION DETAILS	G3161D
Total rating (natural and propane - kW - Nett)	26
Total rating (natural and propane - btu/hr - gross)	97,600
Inlet size (natural and propane)	3/4" BSP
Flow rate - natural (m <sup>3</sup> /hr)	2.70
Flow rate - propane (kg/hr)	1.90
Inlet pressure (natural and propane - mbar)	20 / 37
Oven operating pressure (natural and propane - mbar)	15 / 37
Hob burner rating * (natural and propane - kW)	5.3 x 4
Hob burner rating * (natural and propane - btu/hr)	19,900 x 4
Oven burner rating * (natural and propane - kW)	4.8
Oven burner rating * (natural and propane - btu/hr)	18,000
Oven dimensions (w x d x h - mm)	400 x 535 x 430
Oven shelf (w x d - mm)	400 x 535
Gastronorm compatibility	1/1
Weight (kg)	88
Packed weight (kg)	94
Packed dimensions (w x d x h - mm)	700 x 1000 x 1100

### KEY FEATURES

- Energy efficient, high performance 5.3kW burners - Quick heat up, reduced waiting time
- Semi-sealed, pressed stainless steel hob - Easy to remove and keep clean
- Two x twin cast iron pan supports - Long-lasting and robust
- Vitreous enamelled oven chamber - Easy to clean and to keep clean
- Wide oven temperature range of 120 - 270°C - Ideal to prepare a wide variety of food
- Piezo ignition to oven - Simple, trouble-free operation
- Drop down door to oven - Easy to load and unload
- Oven has 5 shelf positions and allows 2 shelf cooking - Versatile, ideal for a wide range of menu items
- Low profile door handle - Reduces intrusion into work space
- Laser-etched control icons - Permanent, indelible markings

### ACCESSORIES

- Fully integrated extended flue
- Splashplate and plate shelf (not for use with extended flue)
- Oven shelf
- Lift-off fryplate
- Factory fitted, adjustable castors
- Fixed installation kit

### SIMILAR MODELS

- G3161 Four burner range
- G3101HD Six burner heavy duty range
- G3101D Six burner range with drop down door
- G3101 OTC Six burner range - electric fan assisted oven
- G3106 Six burner range - gas fan assisted oven


### INSTALLATION NOTE

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.


Install unit on a level, fireproof surface in a well-lit, draught free position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.

## DIMENSIONS MEASUREMENTS IN MM

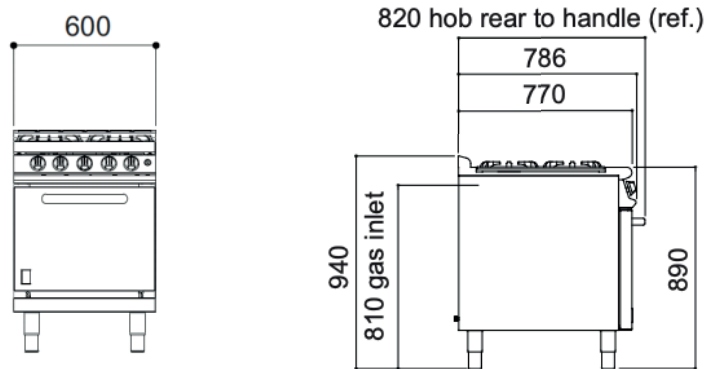

End Elevation



Unit on castors is same height

# SERVICELINE

Catering & Refrigeration Equipment Sales  Est. 1989



01438 363 040

ServiceLine 1 Icen Ct, Icknield Way, Letchworth Garden City SG6 1TN